




STATION MONITORS

1" STATION MONITORS

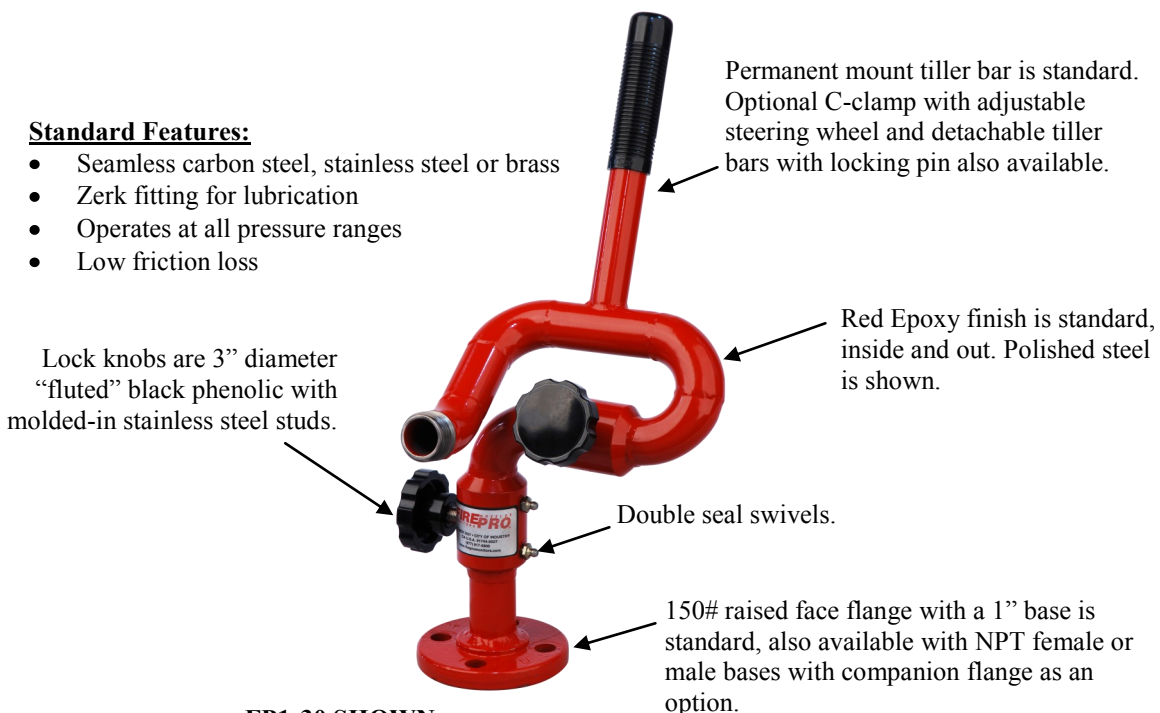

FP1-30 SHOWN

Potter Roemer / Fire Pro® station monitors were specifically designed to meet all requirements of municipal and petrochemical applications. The balanced flow single waterway design configuration and precision machining on swivel joints reduces friction loss while improving stream and distance, and ensures ease of operation at all pressure/flow ranges. Other details, like stainless steel components and standard epoxy powder coating inside and out, protect against corrosion. Monitors are designed to consider space, performance, and ease of use.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP1-30	18 (457)	9-1/4 (235)	15 (25)	1" FLANGE BASE (25)	1" (25)	30 (114)
FP1(F/M)-30	18 (457)	9-1/4 (235)	12 (5)	1" NPT (F) (25)	1" (25)	30 (114)

WWW.FIREPROMONITORS.COM

FIRE PRO NOZZLES AND MONITORS • 17541 HURLEY STREET • CITY OF INDUSTRY, CA 91744 USA •
PHONE 877-917-5800 • 626-937-4723 • **FAX** 626-937-4707 • **EMAIL:** info@firepromonitors.com
 Fire Pro is a member of Acorn Engineering's Family of Companies