




3" STATION MONITORS

Standard Features:

- Seamless carbon steel, stainless steel or brass
- Zerk fitting for lubrication
- Operates at all pressure ranges
- Low friction loss

Lock knobs are 3" diameter "fluted" black phenolic with molded-in stainless steel studs.

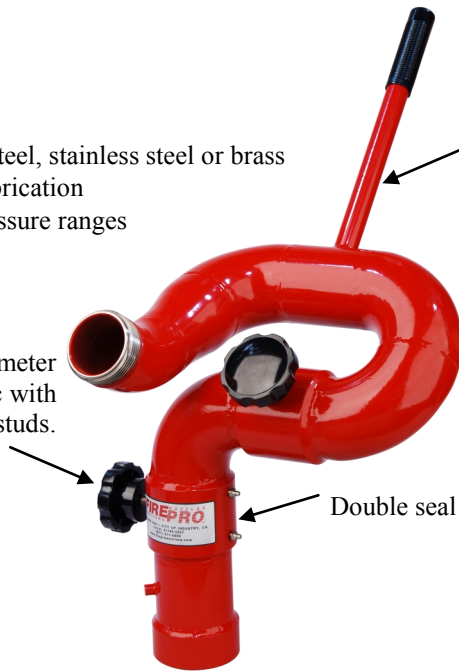

Permanent mount tiller bar is standard. Optional C-clamp with adjustable steering wheel and detachable tiller bars with locking pin also available.

Red Epoxy finish is standard, inside and out. Polished steel is shown.

Double seal swivels.

FP3F-1200 SHOWN

Potter Roemer / Fire Pro® station monitors were specifically designed to meet all requirements of municipal and petrochemical applications. The balanced flow single waterway design configuration and precision machining on swivel joints reduces friction loss while improving stream and distance, and ensures ease of operation at all pressure/flow ranges. Other details, like stainless steel components and standard epoxy powder coating inside and out, protect against corrosion. Monitors are designed to consider space, performance, and ease of use.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP3-1200	28 (711)	16 (406)	52 (24)	3" FLANGE (76)	3"(76) WATERWAY W/ 2-1/2" (64) MALE THREAD	1200 (4542)
FP3(F/M)-1200	28 (711)	16 (406)	52 (24)	3" NPT (F/M) (76)	3"(76) WATERWAY W/ 2-1/2" (64) MALE THREAD	1200 (4542)
FP4-1200	32 (813)	22 (559)	52 (24)	4" FLANGE (102)	3"(76) WATERWAY W/ 2-1/2" (64) MALE THREAD	1200 (4542)

WWW.FIREPROMONITORS.COM