



3" & 4" STAINLESS STEEL MONITORS


Standard Features:

- 100% 304 Stainless Steel (corrosion resistant) construction
- 304 Stainless Steel ball bearings in joints
- Double seal swivels

Red Epoxy finish is standard, inside and out. Polished steel is also an available option.

Options:

- Parallel handle, steering wheel handle
- 360° horizontal rotation
- 135° vertical rotation
- Optional pressure gauge and guard

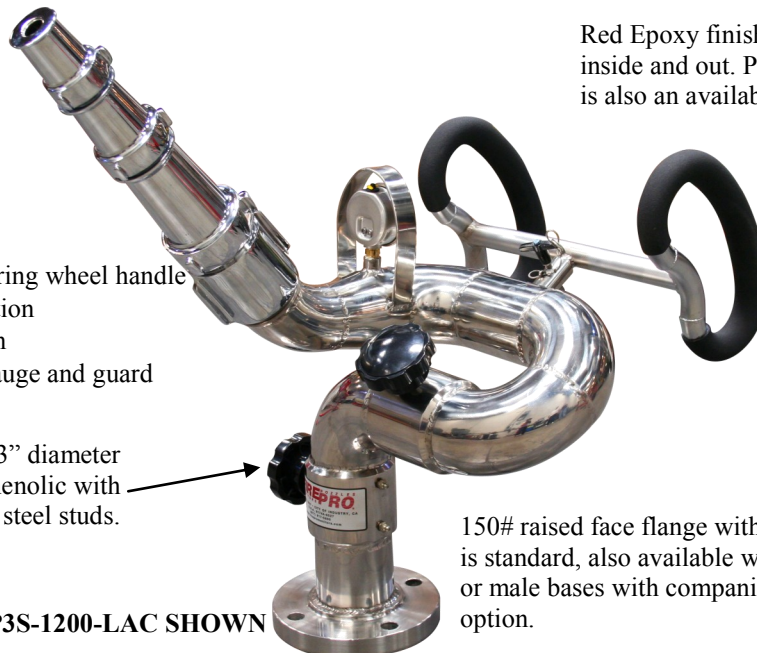

Lock knobs are 3" diameter "fluted" black phenolic with molded-in stainless steel studs.

150# raised face flange with a 3" or 4" base is standard, also available with NPT female or male bases with companion flange as an option.

FP3S-1200-LAC SHOWN

Potter Roemer / Fire Pro® stainless steel monitors reflect the highest standards in the industry. Their 100%, type 304 stainless steel construction is a corrosion resistant and available in a high-polish finish. A vertical blade lock, parallel control handle, pressure gauge, and vinyl dipped steering wheel control (#FP3523) with polished stainless steel connector bracket are all options that create a monitor tailored for distance, accuracy and reliability.

MODEL	HEIGHT In (mm)	WIDTH In (mm)	WEIGHT Lbs (kg)	INLET In (mm)	OUTLET In (mm)	GPM In (mm)
FP3S-1200-LAC	22 (559)	13 (330)	45 (20)	3" FLANGE W/ PARALLEL HANDLES (76)	2-1/2" (64)	1200 (4542)
FP3S-1200	22 (559)	13 (330)	45 (20)	3" FLANGE (76)	2-1/2" (64)	1200 (4542)
FP4S-1200	22 (559)	13 (330)	45 (20)	4" FLANGE (64)	2-1/2" (64)	1200 (4542)
FP4S-2000	28 (711)	16 (406)	52 (24)	3" NPT (F/M) (76)	4" (102)	2000 (7571)

WWW.FIREPROMONITORS.COM

FIRE PRO NOZZLES AND MONITORS • 17541 HURLEY STREET • CITY OF INDUSTRY, CA 91744 USA •

PHONE 877-917-5800 • 626-937-4723 • **FAX** 626-937-4707 • **EMAIL:** info@firepromonitors.com

Fire Pro is a member of Acorn Engineering's Family of Companies

STAINLESS STEEL MONITORS